



Setting up a new User ID on the AyrScout Camera


It is sometimes desirable to have an extra login (or 2) for your AyrScout Cameras for a variety of purposes:

1. Make the video stream available to someone else, or for inclusion in a website or blog
2. Allow someone else to take control of the camera without having access to your AyrMesh.com login details
3. Enable external monitoring programs (again, without giving out your AyrMesh.com login details).

Fortunately, this is easy to do. First, log in to your AyrMesh Camera and select "Server Push Mode:"



Then select "Device Settings" and then "Users Settings" from the menus:

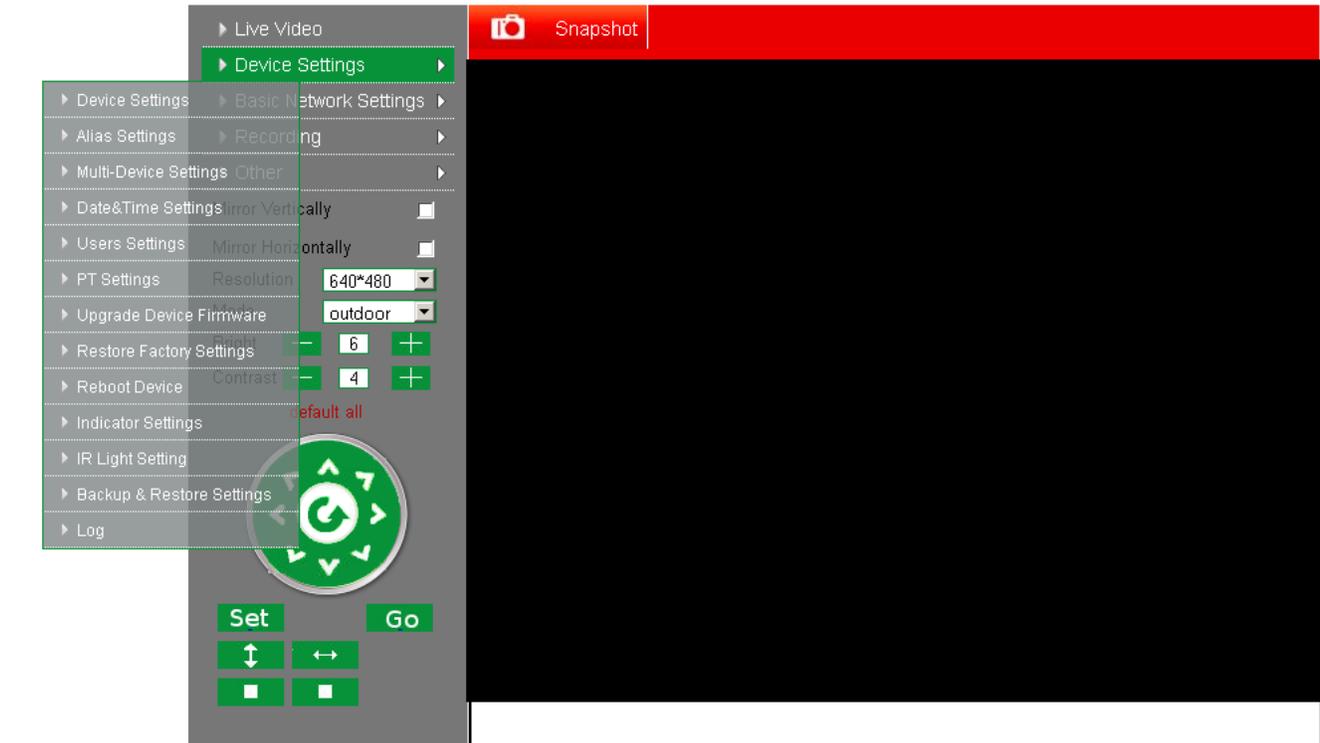

Now just enter the username and password for your additional user(s). You can select "Visitor," "Operator," or "Administrator" permissions for the user. The permissions are as follows:

- Visitor - can only see the picture on the camera; cannot move the camera or control it in any way. This is the best setting for most situations.
- Operator - can see the picture and control the camera (picture size, brightness, contrast, pan and tilt), but cannot change the configuration of the camera. This is recommended for users who will need interactive use of the camera (e.g. a security monitoring service)
- Administrator - can see the picture, control and configure the camera. We do not recommend giving this level of control to anyone else but yourself.

In the following example, I am creating a user called "viewer" with a short password and giving it "Visitor" privileges:

▶ Live Video

▶ Device Settings ▶

▶ Basic Network Settings ▶

▶ Recording ▶

▶ Other ▶

Mirror Vertically

Mirror Horizontally

Resolution

Mode

Bright

Contrast

default all

 Snapshot

Users Settings

User	Password	Group
<input type="text" value="bill"/>	<input type="password" value="••••••"/>	Administrator ▼
<input type="text" value="viewer"/>	<input type="password" value="••••••"/>	Visitor ▼
<input type="text"/>	<input type="password"/>	Visitor ▼
<input type="text"/>	<input type="password"/>	Operator ▼
<input type="text"/>	<input type="password"/>	Administrator ▼
<input type="text"/>	<input type="password"/>	Visitor ▼
<input type="text"/>	<input type="password"/>	Visitor ▼
<input type="text"/>	<input type="password"/>	Visitor ▼
<input type="text"/>	<input type="password"/>	Visitor ▼
<input type="text"/>	<input type="password"/>	Visitor ▼

When you have entered the information for the user(s) you want to add, click the "Submit" button at the bottom of the page. The Camera will reboot:

The screenshot displays the Ayrstone web interface. On the left is a dark grey sidebar with navigation options: Live Video, Device Settings, Basic Network Settings, Recording, and Other. Below these are controls for 'Mirror Vertically' and 'Mirror Horizontally' (both unchecked), 'Resolution' (set to 640*480), and 'Mode' (set to outdoor). There are also brightness and contrast sliders (set to 6 and 4 respectively) and a 'default all' link. A large green circular button with a refresh icon is prominent, with 'Set' and 'Go' buttons below it. At the bottom of the sidebar are four small square buttons with arrows. The main content area has a red header with a camera icon and the word 'Snapshot'. Below the header, a message reads: 'The device is rebooting. Don't shutdown its power. Please wait ... 24'. The background of the main area is a light beige gradient.

...and, when it comes back, you'll be able to log in with the additional user(s) you have added.